

TECHNICAL SPECIFICATIONS

SYSTEM TYPE

Automatic clinical chemistry analyser – random access system, STAT samples processing

THROUGHPUT

400 photometric tests/hour
640 tests/hour with ISE

ON-BOARD PARAMETERS

Up to 45 photometric tests + 4 ISE

SAMPLE TYPE

Serum, plasma, blood, urine, CSF, other biological fluids

NO. OF PROGRAMMABLE PARAMETERS

96 photometric tests, 40 calculated tests and 4 ISE parameters

ASSAY METHODS

End-point, kinetics, ISE (direct potentiometry)

CALIBRATION TYPE

Linear (one point, multi point), exponential, polynomial, factor, cubic spline, Logit-Log 4P, Logit-Log 5P

OPTICAL SYSTEM

Halogen lamp, 12 wavelengths: 340, 376, 415, 450, 480, 505, 546, 570, 600, 660, 700 and 750 nm (diffraction grating)

REAGENT TRAY

56 refrigerated positions (8-12°C)
5, 20, 50 ml reagent containers

SAMPLE TRAY

80 positions:
Outer ring – 50 position for samples
Inner ring – 30 positions for blanks, standards, calibrators, controls and ISE solutions

REAGENT DISPENSING

2 independent dispensing probes with liquid-level sensor
Dispensed volumes:
R1 50 – 300 µl with 1 µl step
R2 10 – 300 µl with 1 µl step

MINIMAL REACTION VOLUME

180 µl

REACTION TRAY

72 reusable hard glass cuvettes, optical path length 5 mm

MIXING SYSTEM

2 independent stirrers,
3 mixing speeds

QC

Levey-Jennigs charts,
Westgard rules

BARCODE READER

Built-in barcode reader

WATER CONSUMPTION

Maximum 13 litres/hour

PC REQUIREMENTS

Operating system:
Up to Win 10, Pentium 4,
RAM 512 MB, HDD 200 GB,
resolution 1024 x 768

POWER SUPPLY

220 V ± 10 %, 50 Hz ± 5 %, 800 VA

DIMENSIONS

910 mm (w) x 780 mm (d)
x 1 160 mm (h)

BACKUP

Complete or selected data



CLINICAL CHEMISTRY ANALYSER.
AFFORDABLE.
RELIABLE.
EFFECTIVE.

XL640

FULLY AUTOMATIC CLINICAL
CHEMISTRY ANALYSER



Erba Lachema s.r.o.
Karásek 2219/1d, 621 00 Brno, Czech Republic
Phone: +420 517 077 111
E-mail: sales@erbamannheim.com
www.erbamannheim.com

TOTAL SOLUTIONS FOR CLINICAL DIAGNOSTICS

XL640

Reliable automation of analysis

DISPENSING OF SAMPLES AND REAGENTS

- Sample volume: 2-70µl (0.2 µl step)
- Reagent volume: R1 50-300 ul (1 µl step)
R2 10-300 ul (1 µl step)
- 3 dispensing probes (sample, R1, R2) equipped with liquid -level sensor and crash detector
- Auto-dilution of samples and calibrators
- Clot detection

ECONOMY

- Minimum reaction volume: 180 µl
- Reusable reaction glass cuvettes

MIXING SYSTEM

- 2 independent stirrers
- 3 user selectable mixing speeds

QUALITY CONTROL

- 4 levels of control material can be used
- Levey-Jennigs graphs
- Twin Plot diagrams for monitoring of systematic and random error




REACTION UNIT WITH WASH STATION

- 72 reusable hard glass cuvettes
- Possibility of replacement of individual cuvette
- Wash station - cuvette rinsing and drying in eight-step procedure
- Automatic cuvette blank measurement before analysis

SAMPLE TRAY

- 80 positions for samples, blanks, standards, calibrators, controls and ISE solutions
- Primary tubes 5, 7 and 10 ml, vacuum system tubes and cups
- STAT sample with priority in any position
- Additional tray for 80 samples included

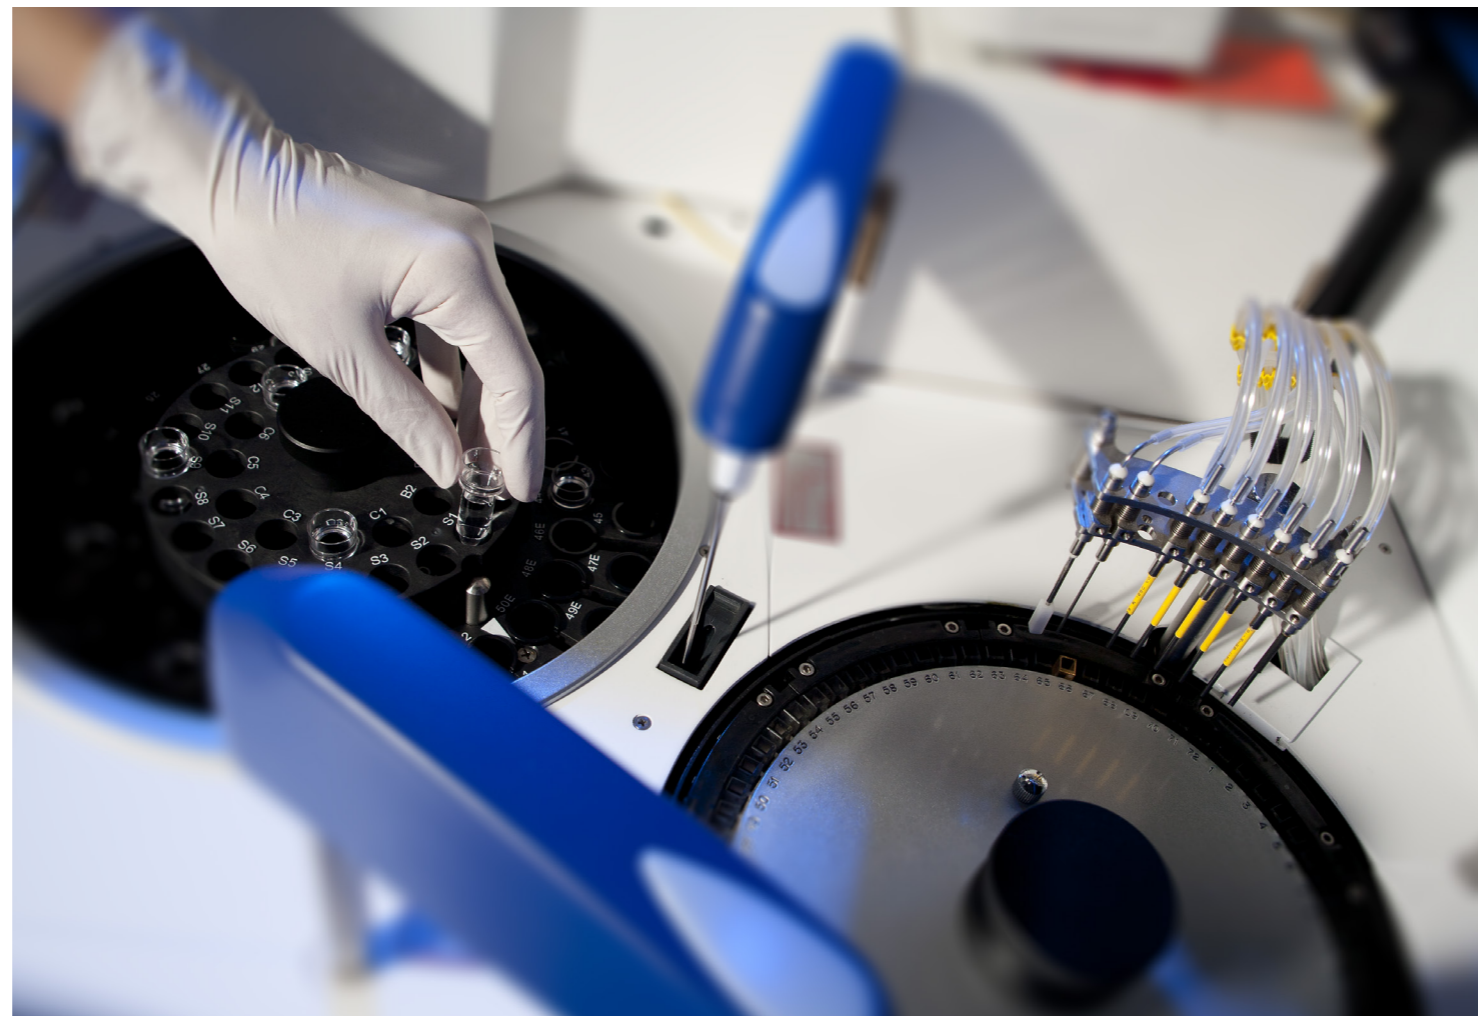

REAGENT TRAY

- 56 positions, 20 ml, 50 ml reagent containers, 5 ml tube with adaptor
- Reagent compartment with Peltier/air cooler (8-12°C)
- Option to use one reagent for several test simultaneously

SOFTWARE

- Convenient user interface
- Connection to LIS
- Programmable auto-start from sleep mode including automatic daily maintenance
- Statistical methods of processing results
- Data export in selected format



MEASUREMENT MONITORING

- Colour indication of sample analysis
- Option of monitoring the reaction in real time
- Reagent volume monitoring
- Informative reports on ongoing analyser status

